

### BG-A-37-2-30

Material Stainless steel 304, 316  
 Rod diameter 1.5mm  
 Rod center d 3.0mm  
 Rope diameter 0.75mm x 4  
 Rope center d 26.4mm  
 Application Curtain wall, partition wall

### BG-A-26-30

Material Stainless steel 304, 316  
 Rod diameter 3.0mm  
 Rod center d 6.0mm  
 Rope diameter 2.0mm x 4  
 Rope center 50mm  
 Application Curtain wall, screen

### BG-A-22-30

Material AISI 304, 316  
 Rod diameter 0.5mm  
 Rod center d 1.6mm  
 Rope diameter 0.5mm x 3  
 Rope center 3.5mm  
 Application Wall-surface



### BG-4305-T


Material: Phosphor copper  
 Open area: 42%  
 Cable diameter: 0.45mm x 3  
 Cable pitch: 3.5mm  
 Rod diameter: 0.5mm  
 Rod pitch: 1.6mm  
 Weight: 2.3kg/m²

### BG-405-S

Material: Stainless steel  
 Open area: 54%  
 Warp diameter: 1.8mm x 4  
 Warp pitch: 50mm  
 Weft diameter: 3mm  
 Weft pitch: 8mm  
 Weight: 8.79kg/m²

### BG-A-36-30

Material AISI 304, 316  
 Rod diameter 3.0mm  
 Rod center d 10.0mm  
 Rope diameter 3.0mm  
 Rope center 5.0mm  
 Application Curtain wall

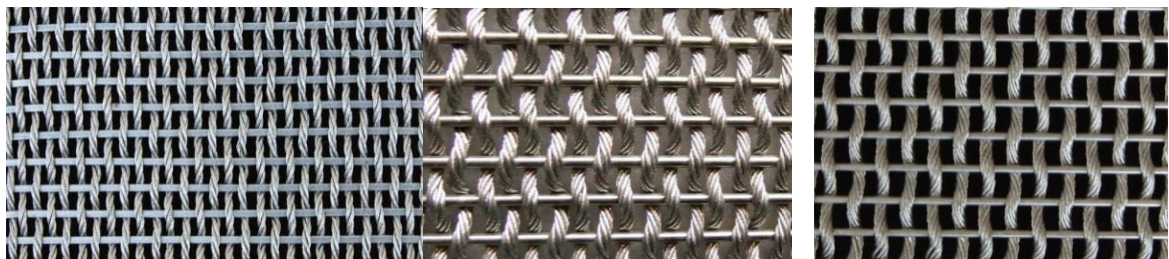

### BG-A-20-30



Material Stainless steel 304, 316  
 Rod diameter 0.75mm x 1.8mm  
 Rod center d 6.2mm  
 Rope diameter 1.7mm  
 Rope center d 3.2mm  
 Application Curtain wall, screen

### BG-4510

Material: Stainless steel  
 Open area: 28%  
 Weight: 17kg/m²  
 Application: Metal Facades, Metal Columns

### BG-A-39-2-30

Material AISI 304, 316  
 Rod diameter 2.0mm  
 Rod center d 8.0mm  
 Rope diameter 2.5mm  
 Rope center 6.0mm  
 Application Curtain wall

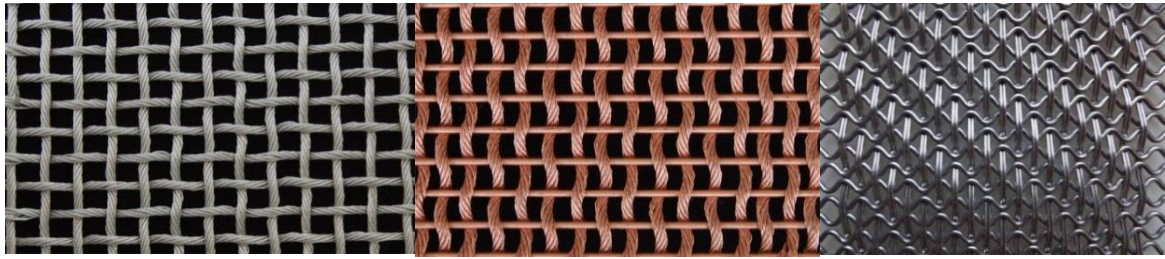

**BG-A-59-30**


Material Stainless steel 304, 316  
 Rope diameter 2.0mm  
 Holes distanc 4.7mm x 4.7mm  
 Application Partition wall

**BG-I3-39-2-30**

Material Red copper  
 Rod diameter 2.0mm  
 Rod center  $\phi$ 8.0mm  
 Rope diamete 2.5mm  
 Rope center 6.0mm  
 Application Partition wall


**BG-1255**

Material:Stainless steel  
 Open area:31%  
 Warp diameter:1.2mm x2  
 Warp pitch:5mm  
 Weft diameter:2mm  
 Weft pitch:5mm  
 Weight:8.74kg/m<sup>2</sup>

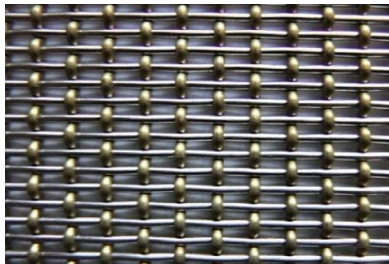


**BG-6510**

Material:Stainless steel, Copper  
 Open area:32%  
 Warp diameter:1.35mm  
 Warp pitch:2.5mm  
 Weft diameter:1.6mm  
 Weft pitch:5.4mm  
 Weight:7.64kg/m<sup>2</sup>

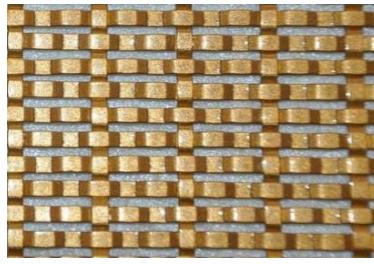

**BG-8222**

Material:Stainless steel  
 Open area:23%  
 Warp diameter:3.3mm x 0.9mm  
 Warp pitch:2.5mm  
 Weft diameter:1.6mm  
 Weft pitch:5.4mm  
 Weight:7.64kg/m<sup>2</sup>

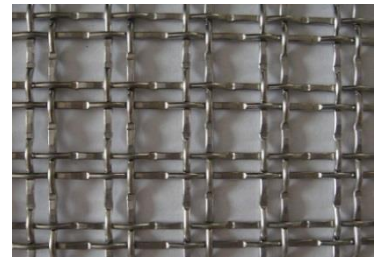

**BG-6226**

Material:Stainless steel  
 Open area:83%  
 Warp diameter:2mm x 2  
 Warp pitch:22.5mm  
 Weft diameter:2mm x 2  
 Weft pitch:22.5mm  
 Weight:4.5kg/m<sup>2</sup>



**BG-6156-T**

Material:Stainless steel,  
 Copper  
 Open area:0%  
 Weight:13kg/m<sup>2</sup>  
 Application: Cladding





**BG-6112**

Material:Stainless steel  
 Open area:52%  
 Warp diameter:2mm  
 Warp pitch:32mm  
 Weft diameter:2mm  
 Weft pitch:4.5mm  
 Weight:6.4kg/m<sup>2</sup>



**BG-6225**

Material:Stainless steel  
 Open area:64%  
 Warp diameter:3mm  
 Warp pitch:20mm  
 Weft diameter:2.5mm  
 Weft pitch:10mm  
 Weight:6.83kg/m<sup>2</sup>

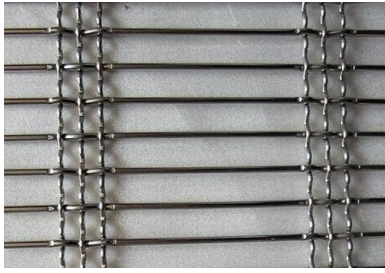

### BG-6410

Material:Stainless steel  
 Open area:65%  
 Warp diameter:2.45mm x3  
 Warp pitch:100mm  
 Weft diameter:4mm  
 Weft pitch:13.5mm  
 Weight:8.68kg/m<sup>2</sup>




### BG-A-66-30

Material Stainless steel 304, 316  
 Rod diameter 2.0mm  
 Rod center d 3.9mm  
 Rope diameter 1.5mm  
 Rope center 22mm  
 Application Partition wall, stair guard r



### BG-A-47-09

Material Stainless steel  
 Weft flat wire 1mm x 4mm  
 Wire distance 7mm  
 Warp rod 1.0mm  
 Rods distance 4 x 4 x 8mm  
 Application Suspended ceiling, partition wall

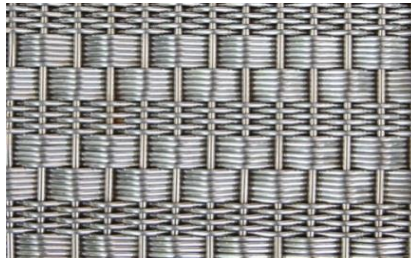

### BG-A-43-3-30

Material Stainless steel 304, 316  
 Weft rod 1.5mm  
 Rod center distance 1.5mm  
 Rod center distance 8.3mm  
 Rods distance 4 x 4 x 8mm



### BG-1530

Material:Stainless steel  
 Open area:0%  
 Cable diameter:2mm x1  
 Cable pitch:17.5mm  
 Rod diameter:1.5mm  
 Rod pitch:1.5mm  
 Weight:10.98kg/m<sup>2</sup>



### BG-A-21-30

Material AISI 304, 316  
 Rod diameter 1.5mm  
 Rod center distance 3.5mm  
 Rope diameter 2.0mm  
 Rope center distance 17.5mm  
 Application Curtain wall




### BG-6152

Material:Stainless steel  
 Open area:0%  
 Warp diameter:1.5mm  
 Warp pitch:6.7mm  
 Weft diameter:2.0mm  
 Weft pitch:2.0mm x4  
 Weight:14.8kg/m<sup>2</sup>





### BG-6152-T

Material:Phosphor copper  
 Open area:0%  
 Warp diameter:1.5mm  
 Warp pitch:6.7mm  
 Weft diameter:2.0mm  
 Weft pitch:2.0mm x1 1.5mm x 4  
 Weight:16kg/m<sup>2</sup>

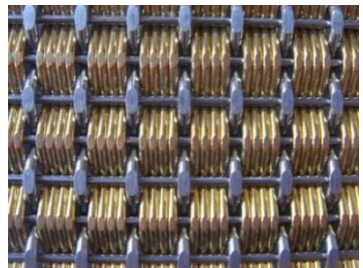


### BG-6513

Material:Stainless steel  
 Open area:0%  
 Warp diameter:1.5mm  
 Warp pitch:6.7mm  
 Weft diameter:2.0mm x1  
 Weft pitch:1.0mm x4  
 Weight:15kg/m<sup>2</sup>

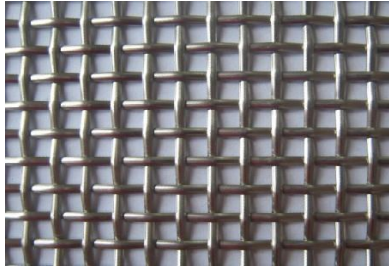


**BG-1705**

Material:Stainless steel  
Open area:58%  
Cable diameter:1.2mm x1mm  
Pitch:5mm  
Weight:3.36kg/m<sup>2</sup>

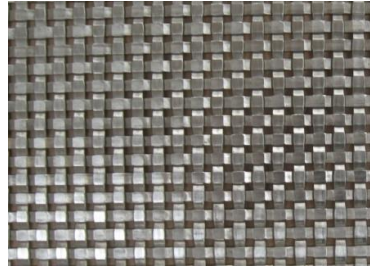


**BG-8535**

Material:Stainless steel  
Open area:33%  
Cable diameter:2.7mm x1.6mm  
Pitch:6.4mm  
Weight:11kg/m<sup>2</sup>

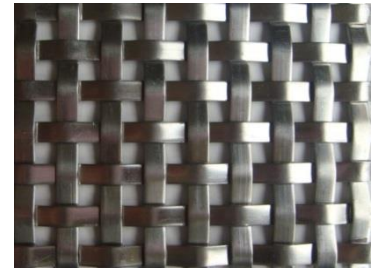


**BG-8156**

Material:Stainless steel  
Open area:25%  
Cable diameter:6mm x1.5mm  
Pitch:12mm  
Weight:12.23kg/m<sup>2</sup>

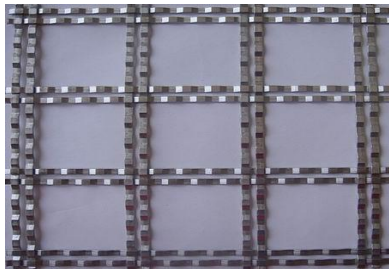


**BG-8216**

Material:Stainless steel  
Open area:80%  
Cable diameter:2.7mm x1.6mm  
Pitch:26mm  
Weight:2.58kg/m<sup>2</sup>

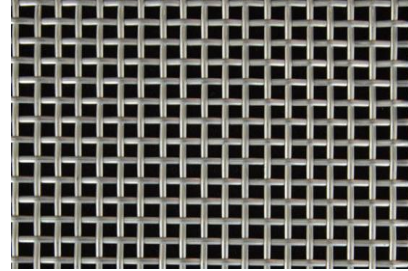

**BG-A-F-30**

Material Stainless steel 304, 316  
Rod diameter 0.75 x 1.8mm  
Rod center  $\phi$ 5mm  
Application Partition wall

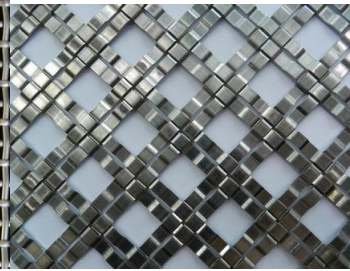


**BG-8272**

Material:Stainless steel  
Open area:37%  
Cable diameter:7mm x1mm  
Pitch:36mm  
Weight:6.35kg/m<sup>2</sup>




**BG-7316**

Material:Stainless steel  
Open area:64%  
Spria diameter:6mm x 1mm  
Spria pitch:36mm  
Cross rod diameter:3mm  
Cross rod pitch:64.5mm  
Weight:3.8kg/m<sup>2</sup>

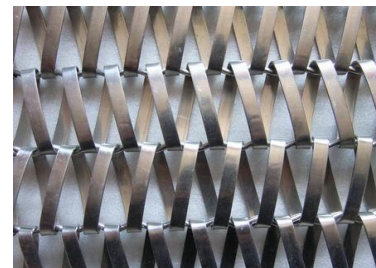



**BG-7024**

Material:Stainless steel  
Open area:28%  
Spria diameter:7mm x 1mm  
Spria pitch:20mm  
Cross rod diameter:3mm  
Cross rod pitch:40mm  
Weight:7.63kg/m<sup>2</sup>

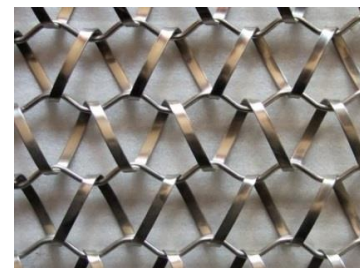

**BG-7338**

Material:Stainless steel  
Open area:56%  
Weight:5.3kg/m<sup>2</sup>  
Application: Metal Facades

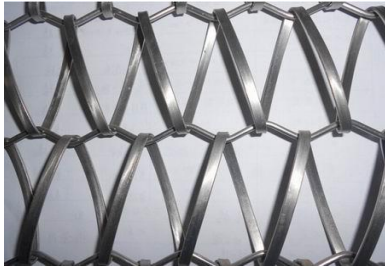

**BG-7324**

Material:Stainless steel  
Open area:69%  
Spria diameter:5mm x 1.7mm  
Spria pitch:36.5mm  
Cross rod diameter:3mm  
Cross rod pitch:64.5mm  
Weight:4.6kg/m<sup>2</sup>



**BG-7115**

Material:Stainless steel  
Open area:31%  
Spria diameter:5mm x 1mm  
Spria pitch:15mm  
Cross rod diameter:4mm  
Cross rod pitch:50mm  
Weight:7.2kg/m<sup>2</sup>




**BG-7650**

Material:Stainless steel  
Open area:38%  
Spria diameter:6mm x 1mm  
Spria pitch:20mm  
Cross rod diameter:5mm  
Cross rod pitch:100mm  
Weight:7kg/m<sup>2</sup>




**BG-7812**

Material:Stainless steel  
Open area:90%  
Sprial diameter:1.2mm  
Sprial pitch:8mm  
Cross rod diameter:1.3mm  
Cross rod diameter:13mm  
Weight:3.5kg/m<sup>2</sup>

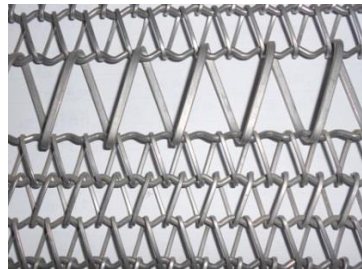

**BG-7317**

Material:Stainless steel  
Open area:65%  
Sprial diameter:1.7mmX1mm  
Sprial pitch:13mm  
Cross rod diameter:2.4mm  
Cross rod diameter:20mm  
Weight:4.5kg/m<sup>2</sup>

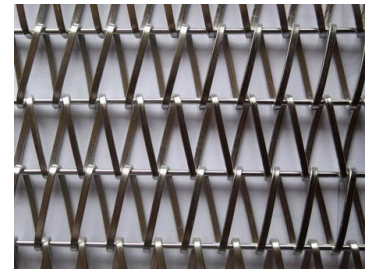

**BG-7148**

Material:Stainless steel  
Open area:55%  
Sprial diameter:4mmX2mm  
Sprial pitch:20mm  
Cross rod diameter:3.5mm  
Cross rod diameter:40mm  
Weight:9.3kg/m<sup>2</sup>